


REV	DESCRIPTION	DATE	CHECK
A1	Change Extraction Force	2016-2-27	FDL

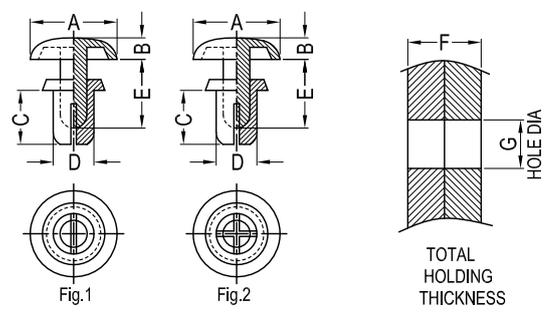

Notes:
 1.Material:PA46 UL94 V2;
 2.Colo:Tan;
 3.RoHS Compliant.

Part No.	Article No.	Hole Dia. G	Extraction Force Kgf(Min.)	Total Holding Thickness F	A	B	C	D	E	Fig.			
20003	GRHR2024	2.1-2.2	3.0	0.6-1.2	4.2	1.2	2.4	2.0	2.8	1			
20007	GRHR2032			1.3-2.0			3.2		3.8				
20011	GRHR2040			2.1-2.8			4.0		5.5				
20015	GRHR2048			2.9-3.6			4.8		7.2				
20019	GRHR2056			3.7-4.4			5.6						
20023	GRHR2064			4.4-5.2			6.4						
20027	GRHR2632	2.7-2.8	3.0	1.0-2.0	5.0	1.4	3.2	2.6	4.6		1		
20035	GRHR2642			2.0-3.0			4.2		6.2				
20040	GRHR2648			2.7-3.6			4.8		7.8				
20044	GRHR2655			3.4-4.3			5.5						
20048	GRHR2664			4.3-5.2			6.4						
20052	GRHR2672			5.1-6.0			7.2						
20056	GRHR3035	3.1-3.2	7.0	1.0-2.0	6.4	1.6	3.5	3.0	5.1			2	
20061	GRHR3045			2.0-3.0			4.5		6.1				
21488	GRHR3050			2.5-3.5			5.0		7.1				
20070	GRHR3055			3.0-4.0			5.5		9.0				
20074	GRHR3065			4.0-5.0			6.5		11.0				
20082	GRHR3075			5.0-6.0			7.5		15.5				
20095	GRHR3080			5.5-6.5			8.0		24.0				
20103	GRHR3090			6.5-7.5			9.0		6.1				
20107	GRHR3100			7.5-8.5			10.0		7.1				
21640	GRHR3145			11.5-13.0			14.5		9.0				
20112	GRHR3230			20.5-21.5			23.0		11.0				
21136	GRHR3055-SP			3.0-4.0			5.5		14.0				
20116	GRHR3535	3.6-3.7	7.0	1.2-2.1	6.4	1.6	3.5	3.5	5.1	2			
20120	GRHR3545			2.1-3.0			4.5		6.1				
20125	GRHR3550			2.7-3.6			5.0		7.1				
20131	GRHR3555			3.0-4.0			5.5		9.0				
20136	GRHR3560			3.7-4.6			6.0		11.0				
20140	GRHR3570			4.5-5.5			7.0		14.0				
20148	GRHR3580			5.5-6.5			8.0		16.6				
20973	GRHR4040			5.5-6.5			8.0		6.5				
20152	GRHR4050	4.1-4.2	15.0	1.7-2.5	8.0	1.8	4.0	4.0	5.0		2		
21641	GRHR4055			2.5-3.5			5.0		7.1				
20165	GRHR4060			3.0-4.0			5.5		9.0				
20175	GRHR4070			3.5-4.5			6.0		11.0				
20182	GRHR4080			4.5-5.5			7.0		14.0				
20186	GRHR4090			5.5-6.5			8.0		16.6				
20193	GRHR4100			6.5-7.5			9.0		6.5				
20200	GRHR4120			7.5-8.5			10.0		8.5				
21359	GRHR4155	9.0-10.5	12.0	10.5									
20205	GRHR5045	5.1-5.2	20.0	1.5-2.5	9.0	2.2	4.5	5.0	6.5			2	
20209	GRHR5055			2.5-3.5			5.5		8.5				
20213	GRHR5065			3.5-4.5			6.5		10.5				
20224	GRHR5075			4.5-5.5			7.5		12.0				
20234	GRHR5085			5.5-6.5			8.5		16.6				
20240	GRHR5095			6.5-7.5			9.5		6.5				
20244	GRHR5105			7.5-8.5			10.5		8.5				
20248	GRHR5865			3.0-4.5			10.5		12.0				
20937	GRHR6060	5.9-6.0	20.0	2.5-4.0	12.0	2.7	6.3	5.8	9.0	2			
20256	GRHR6080			2.5-4.0			6.0		10.0				
21137	GRHR6026			3.5-5.5			8.0		28.0				
21642	GRHR6028			21.5-23.5			26.0		30.5				
		6.1-6.2	30.0	23.5-25.5	12.0	3.0	28.5	6.0	30.5				2
				3.0-4.5			6.3		5.8				

有限会社フジロック

有限会社フジロック						DATE	2021-11-4	DIMENSION	TOLERANCE
TITLE	PUSH RIVETS					SCALE	FIT	L ≤ 4	±0.10
ARTICLE NO.	GRHR	MOLD NO.	/	DRAW	JF	UNIT	MM	4 < L ≤ 15	±0.20
PART NO.	SEE TABLE	MATERIAL	SEE TABLE	DESIGN	JF	VERSION	A1	15 < L ≤ 50	±0.30
DWG NO.	/	COLOR	SEE TABLE	APPROVAL	FDL	VIEW		50 < L ≤ 100	±0.40